


**■ Features**

- ✚ Four 12VDC individually fused outputs
- ✚ Circuit Short protection
- ✚ High-temperature protection
- ✚ AC power LED indicator
- ✚ Individual LED's for each output
- ✚ Power ON/OFF switch
- ✚ Unit maintains camera synchronization
- ✚ Easy installation saves time and eliminates costly labor
- ✚ Spare fuses included
- ✚ 2 years warranty


**■ Specification**

Input Voltage	AC90-264V
Input Voltage Frequency	50/60Hz
<b>Output Specification</b>	
Output Voltage	12VDC+10%
Total Output Current	16.5 A(12CH→1A,6CH→0.5A,meet for different camera)
Total Outputs	201W
Fuse Type	Glass Fuse
Fuse Rating	1 Amps / 250VAC, 0.5 Amps / 250VAC
<b>Protection</b>	
General Protection	each output has individual fuse and LED indicator, when problem occurs,only affect the individual output, other outputs still working
Circuit Short Protection	when short condition occurs, individual fuse will open the circuit,when condition removed, replacing another new fuse will back to close.
Over-load protection	105-135%hiccup mode,auto-recovery
Over-voltage protection	115-135%,Shut down o/p voltage, re-power on to recover
<b>General Specifications</b>	
Working temperature and humidity	-10℃~+60℃, 20%~80%RH
Store temperature and humidity	-20℃~+85℃,10%~90%RH
<b>Application</b>	
CCTV	Camera, PTZ, IR Illuminators, Video Process Equipment, etc.

## ■ Shape and installation dimension



## ■ Manual

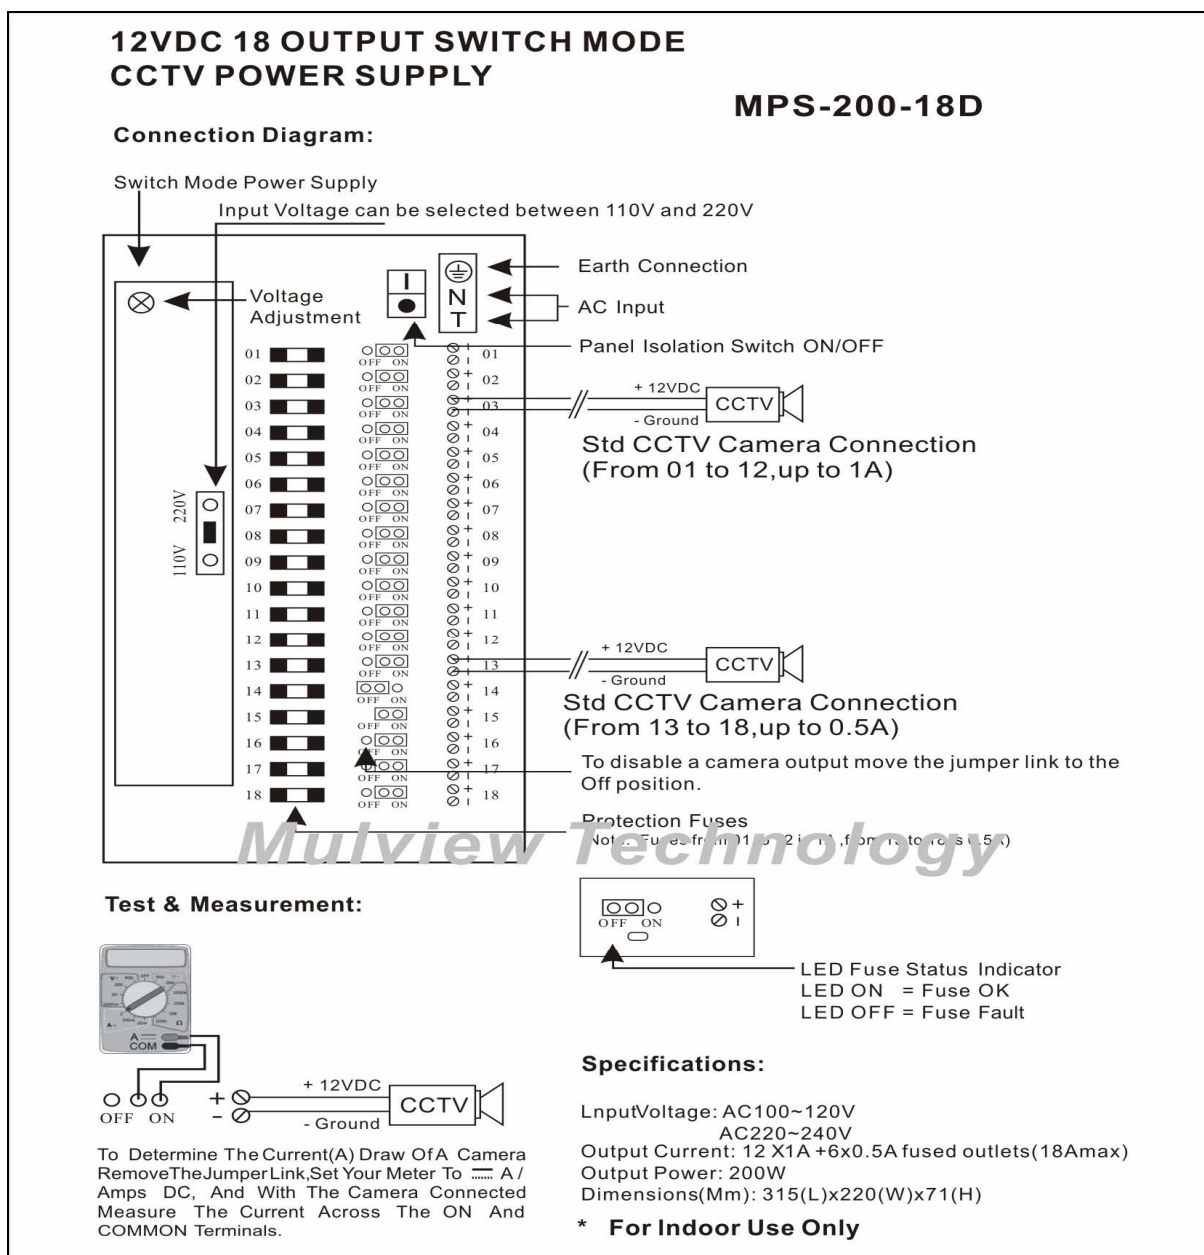

**Multiple View, More attention!**

**Mulview Technology Limited**

<http://www.mtlcctv.com>

TEL:0086-755-88849659 FAX:0086-755-83722362 E-mail:mulviewcctv@gmail.com,sales@mtlcctv.com